


3 Hook 2 Roller Vectis Plus Door Lock



Features

- Vectis Plus encompasses ERA's traditional lever technology used in mortice locks for centuries; combined with today's modern multi-point locking systems
- Patented 5 lever design eliminates the need for euro cylinder operation – so completely free from cylinder manipulation through snapping or bumping.
- Vectis Plus can be keyed alike to ERA's mortice lock range giving front and back door access with the same key
- Supplied with 3 brass keys
- Designed to meet the requirements of PAS 24 as part of a compliant door system, and BS 6375
- Available as 35mm Backset only with 16mm face bar
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Bi-directional throw of locking features – enhanced anti-jemmy feature
- Triple high security hooks for anti-separation resistance - 10mm engagement into keeps
- Hooks deadlocked in the fully thrown position
- Precision adjustable rollers for enhanced performance and weathersealing
- Suites with the Vectis door handle range
- Split spindle for lever/pad applications - choice of length available
- 6000 Series adjustable steel keeps offering $\pm 2.0\text{mm}$
- Continuous keep available
- Easy-fit packer system for alternative profiles
- Optional shootbolt engagement for additional security
- Single and French door (passive lock kit) applications

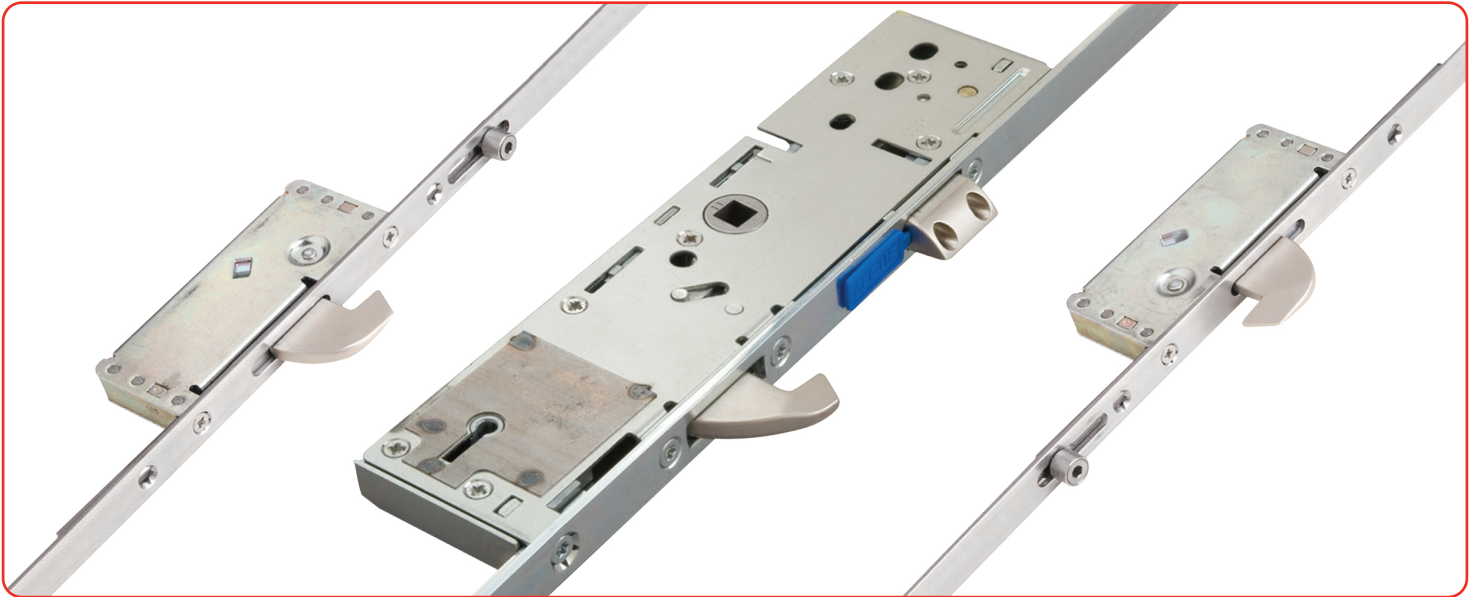

Keeps



Shootbolt (optional)

3 Hook 2 Roller Vectis Plus Door Lock

Ordering Details

To select the required 3 hook 2 roller MPL part number, use the tables below to determine:
 1. The backset
 2. The position of the rollers

KEY

B	Backset
DL	Datum Line
OL	Overall Length
TH	Top Hook
TR	Top Roller
BH	Bottom Hook
BR	Bottom Roller

OPTION 1

B	DL	OL	TH	TR	BH	BR	Part No.
35	1050	2100	610	715	610	715	9635-00-85AV

OPTION 2

B	DL	OL	TH	TR	BH	BR	Part No.
35	1050	2100	730	835	750	855	9635-00-85BV

Please contact the sales office for cylinder and handle part codes

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)

Operation

Endurance tested in excess of 50,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

Material Specification

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Hook and dead/sash bolt:	Steel BZP CR3 Passivate + Seal
Keeps:	Steel BZP CR3 Passivate + Seal

Packaging

Locks:

5 locks per box

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

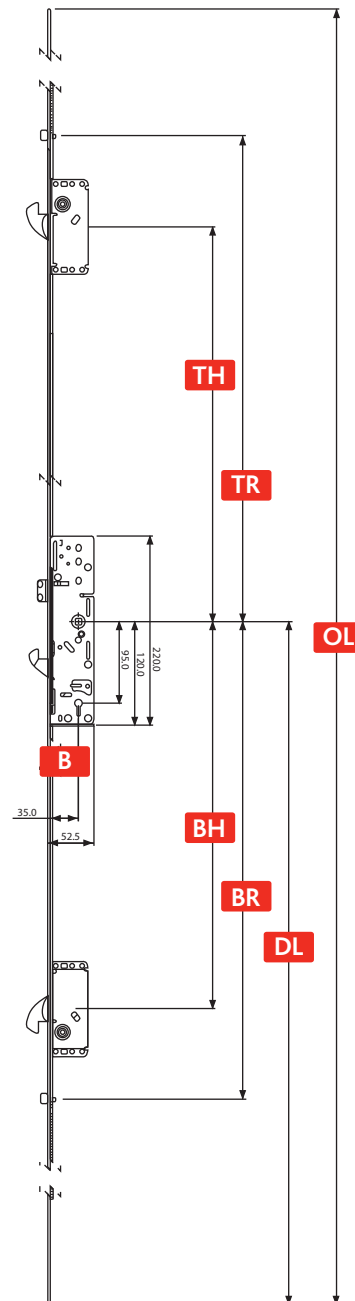


Diagram illustrates product in locked position.
 All dimensions are in mm and are nominal.
 ERA reserves the right to change specification without notice
 It is the responsibility of the door manufacturer to ensure that
 the finished product meets any required safety and performance specification.